

Kumbhojkar Plastic Moulders

Tel.: +91-94042 38939

www.kumbhojkarplastics.com



Cable Drag Chain - Round Design

www.kppl.co.in


- ✓ Round shape ✓ Low noise ✓ Smooth operation
- ✓ Both side snap open ✓ Improved performance





Quality Plastic Engineering Products At Your Finger Tips

 Non-Snap Open	Model No. RDC_9x10				
	Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
	9	10	26.5	15	65
	Outermost Width		Outermost Height		Moving Height
	17.5		14	67	

 Non-Snap Open	Model No. RDC_16x10				
	Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
	16	10	28.5	20	50
	Outermost Width		Outermost Height		Moving Height
	26		15	65	

 Non-Snap Open	Model No. RDC_20x15				
	Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
	20	15	41	32	31
	Outermost Width		Outermost Height		Moving Height
	31		20	102	

 Non-Snap Open	Model No. RDC_30x19				
	Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
	30	19	47	36	27
	Outermost Width		Outermost Height		Moving Height
	41		25	117	

 Non-Snap Open	Model No. RDC_48x25				
	Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
	48	25	70	44	22
	Outermost Width		Outermost Height		Moving Height
	63		37	177	



Both Side Openable

Model No. RDC_33x26

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
33	26	78	45.5	22
Outermost Width		Outermost Height		Moving Height
49		37		193



Both Side Openable

Model No. RDC_45x26


Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
45	26	78	45.5	22
Outermost Width		Outermost Height		Moving Height
62		37		193



Both Side Openable

Model No. RDC_65x26

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
65	26	78	45.5	22
Outermost Width		Outermost Height		Moving Height
81.5		37		193

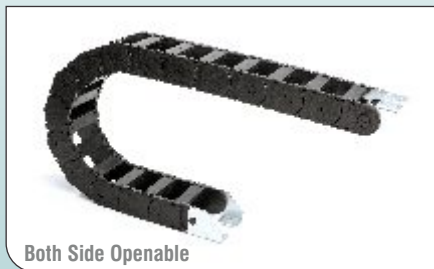

Both Side Openable

Model No. RDC_80x38


Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
80	38	105	60	16
Outermost Width		Outermost Height		Moving Height
100		50		260



Both Side Openable


Model No. RDC_100x38

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
100	38	105	60	16
Outermost Width		Outermost Height		Moving Height
120		50		260

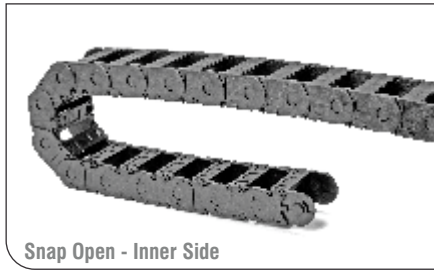


Model No. RDC_60x25

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
60	25	60	45	22
Outermost Width		Outermost Height		Moving Height
77.5		35		155

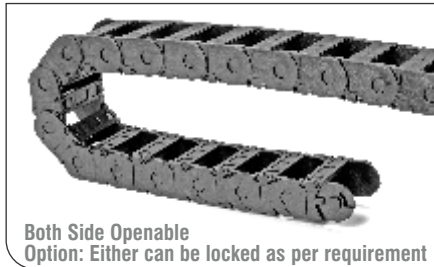


Model No. RDC-S-40x25.BR55

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
40	25	55	45	22
Outermost Width		Outermost Height		Moving Height
56		36		146

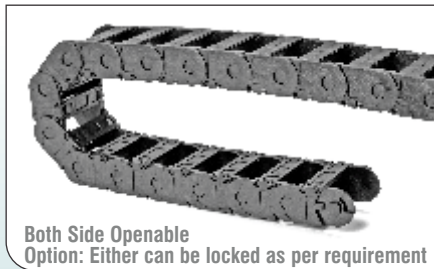


Model No. RDC-S-40x25.BR80

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
40	25	80	45	22
Outermost Width		Outermost Height		Moving Height
56		36		196

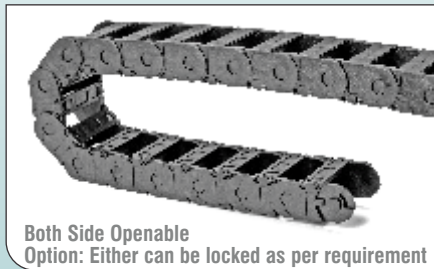


Model No. RDC-S-52x25.BR55

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
52	25	55	45	22
Outermost Width		Outermost Height		Moving Height
68		36		146

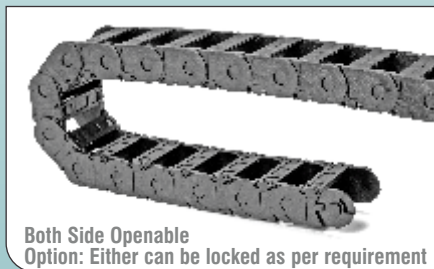


Model No. RDC-S-52x25.BR80

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
52	25	80	45	22
Outermost Width		Outermost Height		Moving Height
68		36		196




Both Side Openable
Option: Either can be locked as per requirement

Model No. RDC-S-65x25.BR55					
Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr	
65	25	55	45	22	
Outermost Width		Outermost Height		Moving Height	
80.7		36		146	




Both Side Openable
Option: Either can be locked as per requirement

Model No. RDC-S-65x25.BR80					
Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr	
65	25	80	45	22	
Outermost Width		Outermost Height		Moving Height	
80.7		36		196	



Both Side Openable
Option: Either can be locked as per requirement

Model No. RDC-S-78x25.BR55					
Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr	
78	25	55	45	22	
Outermost Width		Outermost Height		Moving Height	
94		36		146	



Both Side Openable
Option: Either can be locked as per requirement

Model No. RDC-S-78x25.BR80					
Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr	
78	25	80	45	22	
Outermost Width		Outermost Height		Moving Height	
94		36		196	



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_100x45.BR150

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
100	45	150	67	14
Outermost Width		Outermost Height		Moving Height
125		64		364



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_125x45.BR150

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
125	45	150	67	14
Outermost Width		Outermost Height		Moving Height
157		64		364



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_150x45.BR150

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
150	45	150	67	14
Outermost Width		Outermost Height		Moving Height
176		64		364



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_200x45.BR150

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
200	45	150	67	14
Outermost Width		Outermost Height		Moving Height
227		64		364



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_100x45.BR200

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
100	45	200	67	14
Outermost Width		Outermost Height		Moving Height
125		64		464



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_125x45.BR200

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
125	45	200	67	14
Outermost Width		Outermost Height		Moving Height
157		64		464



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_150x45.BR200

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
150	45	200	67	14
Outermost Width		Outermost Height		Moving Height
176		64		464



Both Side Openable - KP. STD Outer Side Locked

Model No. RDC_200x45.BR200

Width-IW	Height-IH	BR	Pitch(P)	Links/Mtr
200	45	200	67	14
Outermost Width		Outermost Height		Moving Height
227		64		464

Separators Available For Models RDC 33 Onwards.



SPR-W25
For RDC 100*45 & RDC 200*45



SPR-W22
For RDC 125*45 & RDC 150*45



SPR-110*60
For RDC 100*38 & RDC 80*38



SPR-80*45-S
For RDC-S- 40*25, RDC-S- 52*25,
RDC-S- 65*25, RDC-S- 78*25



SPR-80*45
For RDC- 33*26, RDC- 45*26
RDC- 65*26

Visit <https://youtu.be/frJMB3EgwEA> for Dragchain Installation Guidelines.
Use of Guide Tray recommended.



Anand Kumbhojkar

mktg@kumbhojkarplastics.com
sales@kumbhojkarplastics.com

129, Narayan Peth, Sitaphal Baug Colony
Near Mati Ganpati, Pune - 411 030. INDIA
Tel.: +91-96070 03424 +91-94042 38939

26 innovative products available. For more details visit us at: www.kppl.co.in



www.kumbhojkarplastics.com